



HGP-22A

- Displacement : 2~12 cc/rev (single)
- Max. Pressure : 250 kgf/cm²
(3500psi)
- Flange : JIS 4-bolt

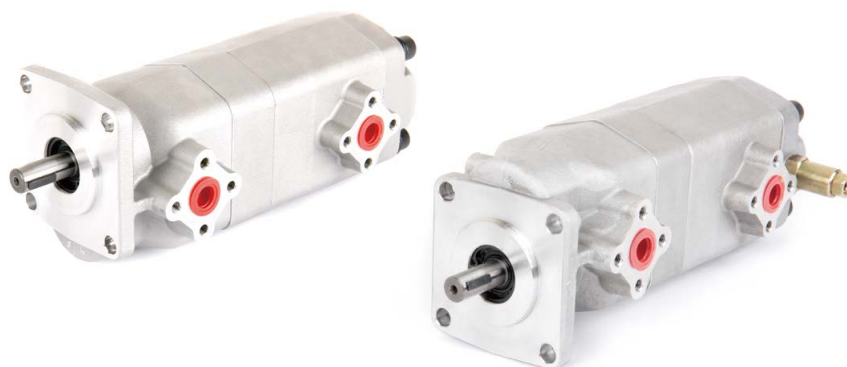

SCHEMATIC SYMBOL

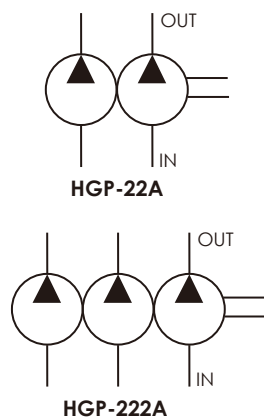

ORDER CODES

HGP-22A - **F** - **3** **2** - **R** - **X2** - **4BJ** - **P2**

1 2 3 3 4 5 6 7

1	Model Name	HGP-22A, HGP-222A	
2	Mounting	F	flange type
		L	foot type
3	Delivery Capacity	2, 3, 4, 5, 6, 8, 9, 11, 12	
4	Rotation Direction	R	clockwise
		L	counter - clockwise
5	Shaft Type *	W: tang shaft	X: straight shaft
		Y: spline shaft	Z: taper shaft
6	Flange Mounting Type	4BJ	JIS 4-bolt
7	Inlet and Outlet *	F: flange type(F1)	G: G, BSP, PF(G1~G2)
		P: PT(P1~P2)	

* The dimension of shafts and inlet & outlet sizes please refer to Page 15.

SPECIFICATIONS


Model	Accurate Displacement Capacity (cc/rev)	Operational Pressure (kgf/cm ²)	Max. Pressure (kgf/cm ²)	Speed (r.p.m.)			Weight (kg)
				Rate	Max.	Min.	
HGP-22A-22	2+2	210	250	1800	4000	700	3.38
HGP-22A-33	3+3	210	250	1800	4000	700	3.40
HGP-22A-44	4+4	210	250	1800	4000	700	3.40
HGP-22A-55	5+5	210	250	1800	4000	700	3.42
HGP-22A-66	6+6	210	250	1800	3500	700	3.42
HGP-22A-88	8+8	210	250	1800	3000	600	3.48
HGP-22A-99	9+9	210	250	1800	2500	550	3.48
HGP-22A-1111	11+11	210	250	1800	2000	500	3.48
HGP-22A-1212	12+12	175	210	1800	2000	500	3.52

* We provide many options to meet your displacement inquiries of tandem gear pumps, such as HGP-22A-85 (8+5 cc/rev).


* HGP-22A-5 do not belong to regular products. Customized service can be provided.

DIMENSIONS (unit : mm)

HGP-22A-X-4BJ

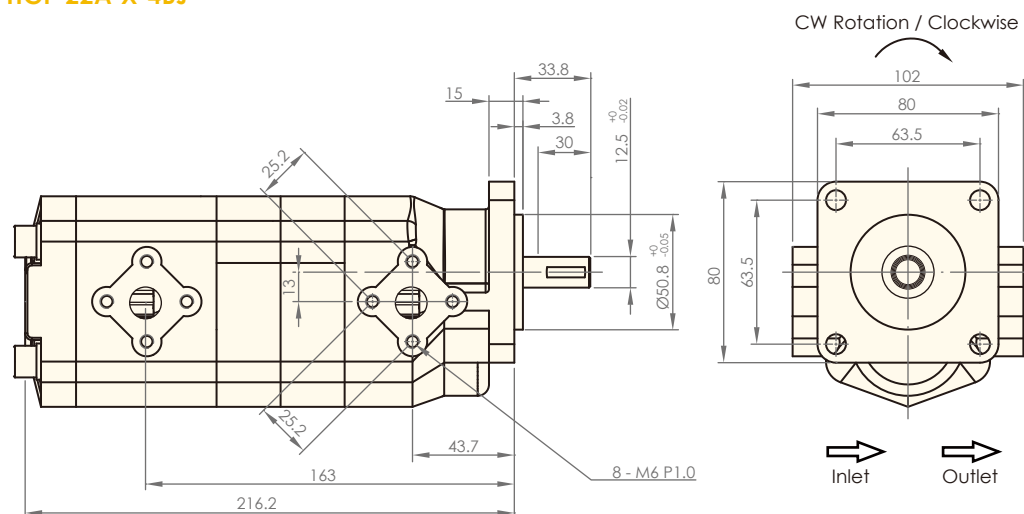

HGP-222A-X-4BJ

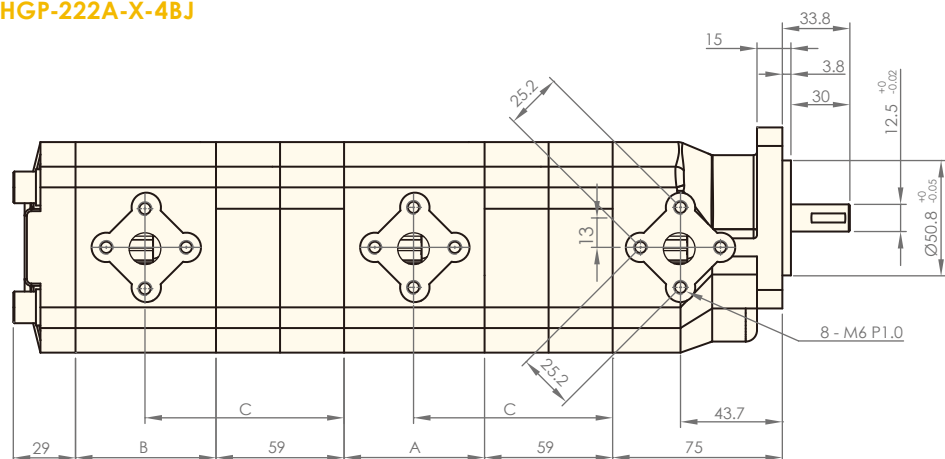

Model	A, B	C
HGP-222A-2	42.5	80.25
HGP-222A-3	45	81.5
HGP-222A-4	47	82.5
HGP-222A-5	49	83.5
HGP-222A-6	52	85
HGP-222A-8	54	86
HGP-222A-9	57	87.5
HGP-222A-11	57	87.5
HGP-222A-12	57	87.5

HGP-222A-Y-4BJ

